


Silvertex

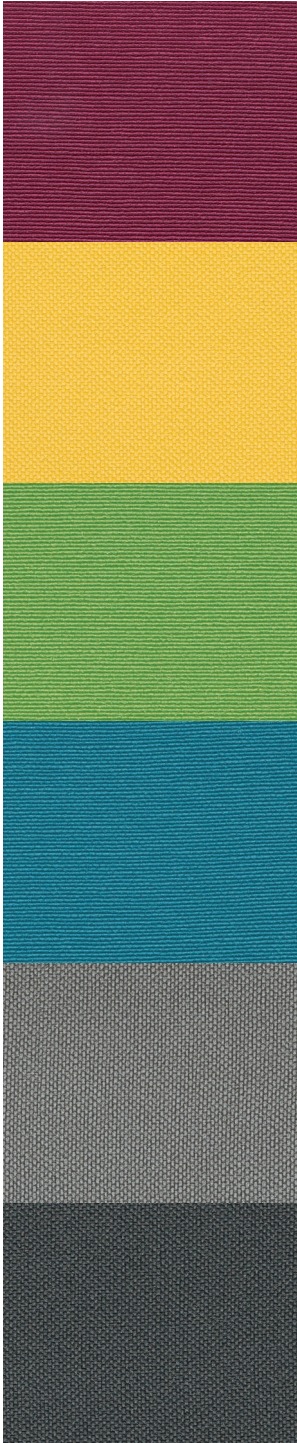

Silvertex Specifications	
Characteristic	Specification
Content	Vinyl
Cleaning code	
Weight	30 oz./sq. yd.
Width (inches)	54"
Country of origin	
Abrasion (CFFA 1-a, ASTM d-4157)	100,000 cycles, Wyzenbeek #10 cotton duck
California T.B (CA117 – 2013)	Pass
UFAC	Class I
NFPA 260	Class 1
Backing	Hi-Loft™
Special finish	PERMABLOK™ (Urethane finish)
Railroaded	No
AATCC TM 147	Antibacterial
ASTM D-257	Antistatic
ASTM G21	Mildew resistant
Fisher Body TM 31-12	Sulfide stain resistant
UV stability Xenotest: AATC TM 16-3/NTC 1479 CFFA-2 ai-Blue Wool	1000 hours
Cold crack CFFA-6A	-10F
ACT performance guidelines	Meets or exceeds guidelines
Other characteristics	Stain resistant No heavy metals Formaldehyde free Easily cleaned