

Carrel (Low & High) Assembly Instructions




STARTER/ADDER CARREL WITH HIGH ENDS SHOWN **Note:** The assembly of this unit requires two people.

TOOLS REQUIRED:


- Phillips Tip Screwdriver
- Rubber Mallet
- Locate the intermediate panel. Repeat Step 1 to attach
 the end/intermediate panel to opposite end of the back
 panel. Continue to repeat this step until all additional
 intermediate panels, backs and opposite end panels
 have been attached.



- 1. Locate the back panel and LH end panel. Attach back panel to end panel by having one person hold the end panel in an upright position and a second person slide the back panel over the four shoulder screws located near the back edge of the end panel. Once the back panel has been slid downward enough to engage the shoulder screws, use rubber mallet to properly seat the modular clips.
 - *NOTE: Be sure the trough holes and worksurface attachment holes are facing toward the inside of the carrel.




3. Locate the worksurface. Attach the worksurface to the end/intermediate panels. Note the relief cutouts on the bottom of the worksurface near each of the modular clips. Slide the worksurface between the end/intermediate panels until the relief cutouts align with the shoulder screws. Lower the worksurface and slide toward the back panel to engage the shoulder screws. Use the rubber mallet to properly seat the modular clips onto the shoulder screws.




Carrel (Low & High) Assembly Instructions

4. Lock the worksurface together with back panel by using 2 angle brackets. Fasten the brackets to the bottom rear of the worksurface first using the supplied #8 x 5/8 screws. Fasten to the back panel to eliminate any gap. Next, repeat at the front edge of the worksurface and end/intermediate panel using additional screws. Repeat the process on all worksurfaces.




6. Locate the wire management trough. Align the holes in the wire management trough to the holes in the back panel below the worksurface. Attach by using #8 x 5/8 screws .

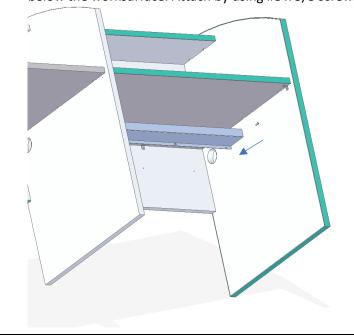


5. *Note: Low carrels are sold without shelves. Skip this step if you purchased low carrels.

Locate the shelves. Attach the shelves to the end/intermediate panel. Lower the shelves over the shoulder screws above the worksurface and slide toward the back panel to engage the shoulder screws. Use a rubber mallet to properly seat the modular clips. Repeat this step for all remaining shelves.



7. Insert the wire management grommets into ends, intermediate panels and worksurfaces

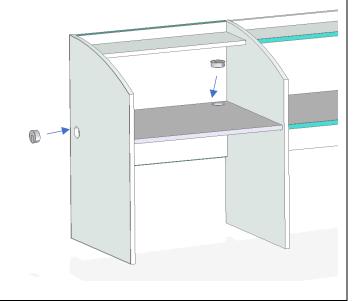

For questions, please call us at (616) 396-1142